

PR64

Fold-up High-speed Door.

Windproof.



Technical Description.

The **Inkema PR64 Fold-up High-Speed Door** is designed for outdoor installation. Its high wind resistance insulates the interior of the facility from adverse weather conditions.

The high-speed opening and closing help minimize temperature losses in both winter and summer, ensuring significant energy savings throughout the year.

This high-speed door allows for intense incoming and outgoing traffic in commercial and industrial applications, combining security, reliability, and straightforward maintenance.

Technical Features.

- **Application:** Indoor/Outdoor
- **Max. Size:** 6000 × 6000mm (width x height)
- **Material (structure):** Lacquered Steel
- **Max. Speed:** Opening: (~0.6m/s)
Closing: (~0.6m/s)
- **Canvas Material:** High-Resistance PVC (900g/m²)
- **Wind Resistance:** Class 4.
- **Life Cycles:** 750,000 cycles

Additional Features.

Features	<input type="radio"/>	<input type="radio"/>
Light Curtain	<input checked="" type="radio"/>	<input type="radio"/>
Safety Photocell	<input checked="" type="radio"/>	<input type="radio"/>
A row of small windows	<input checked="" type="radio"/>	<input type="radio"/>
Second row of small windows	<input type="radio"/>	<input type="radio"/>
Additional push button panel	<input type="radio"/>	<input type="radio"/>
Intermediate Stop	<input type="radio"/>	<input type="radio"/>
Extra opening options	<input type="radio"/>	<input type="radio"/>

● Standard Feature ○ Optional Feature *For other options, consult Customer Service.

The **PR64 Fold-up High-Speed Door** has been designed and manufactured in accordance with European standards: **EN 13241-1:2004+A2:2017**

Operation.

- IP65 GFA Elektromaten Motor
- Electronic End-of-Stroke (Encoder)
- IP65 Panel with GFA Elektromaten Membrane
- Power Supply Voltage: 230V I
- Emergency Stop (optional)
- Clutch-Disengaged Motor for Manual Operation
- Uninterrupted Power Supply System (optional)




Safety Systems.

The **PR64** comes standard with two safety systems:

Upward Safety Photocell: Designed to prevent accidental dragging in case a person or object gets caught in the curtain

Downward Safety Light Curtain: Enables automatic opening before coming into contact with any obstacle.




Safety Photocell



Safety Light Curtain

Dimensions.

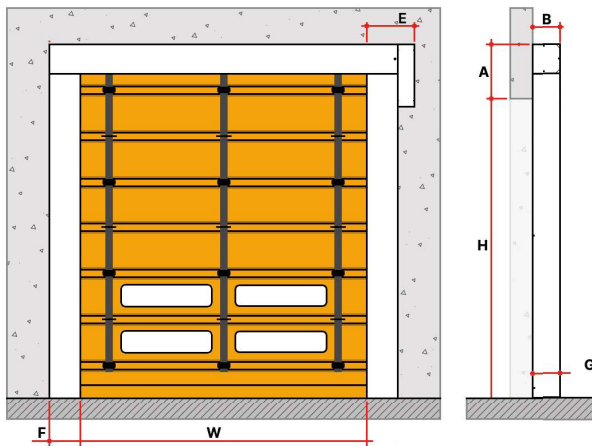

H	W	A	B	C	D	E	F	G
6000(2000)	6000(820)	1250(1100)	250(200)	-	-	520	250(200)	250(200)

Canvas and Frame Color Range.



Green, blue, grey, cream, yellow, orange, others upon request, & 100% personalised).